

Product Features:

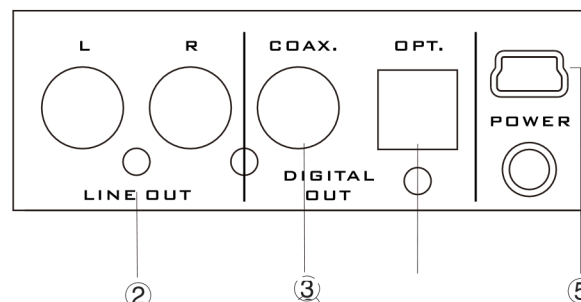
The BTS-2 Bluetooth receiver allows you to be completely relieved from the troubles of plugs and wires. You don't need to get up and leave the sofa. You only need to touch it with your fingers to enjoy a rich private music feast. You can sit leisurely on the sofa at home and use all Bluetooth-enabled mobile phones and other Bluetooth devices such as laptops.

The wireless transmission can easily and perfectly show the music through the home audio system. Integrated Qualcomm APTX-HD high-definition audio Bluetooth technology, which makes music produce sound quality comparable to CD-level. A technology shows the superior stereo audio quality in the Bluetooth connection, and its complete audio frequency bandwidth is consistent with high-fidelity performance. In addition, APTX HD's low-latency audio encoding technology minimizes latency, and solves the "lip sync problem", allowing you to enjoy unparalleled listening quality.

Front panel



Rear panel

**Function introduction:**

- ① Power indicator
- ② Line out (Analog L/R audio) output port
- ③ Digital Coaxial output port
- ④ Digital optical output port
- ⑤ DC 5V power supply port, connected to DC 5v power supply adaptor
- ⑥ Analog/Digital output switch button:

- a: When switch to Analog, it only has Analog L/R audio output.
- b: When switch to Digital, it only has SPDIF audio output, which are optical, Coaxial signal output.

Connection operation instructions:

1. Connect to your Hi-Fi amplifier through BTS-2's analog L/R output port 2; or digital optical port 4; or digital coaxial port 3.
2. The digital analog output switch ⑥ is used to select digital or analog audio output. When you use analog audio output, you need to switch to the Analog end and use digital SPDIF audio please switch the signal to Digital end.
3. Pair with your Bluetooth device: first connect the BTS-2 to the power supply, and then turn on the search function of the Bluetooth device. When you can find the Bluetooth device named "Audio BT", then you can do pairing and connection. .

Note: If prompted to enter a password, the default password is 0000.

4. After connecting, set the Bluetooth as the audio output device, and the music will be played at this time, and the sound will come out of your audio system...

5. Unplug the BTS-2 power supply and it will automatically disconnect. When reconnecting, just click the "Audio BT" connection displayed on the Bluetooth device.

Bottom plate label

